

## 4-Port USB KVM Switch w/ Audio

### Product Overview

The KVM-0421 4-Port USB KVM Switch with Audio from LevelOne offers users with an easy to install KVM switch that can manage four computers from a single monitor, keyboard and mouse. With audio support, users can connect a single set of speakers directly to the KVM switch and enjoy listening to music and watching movies from whichever computer without switching cables.

It allows users to access, control, boot and reboot four USB-enabled multimedia computers using a single USB keyboard, mouse and monitor and a speaker set and microphone.

### Flexible Multimedia Feature

Users are now offered with flexible multimedia support. The KVM-0421 offers users with user-programmable simultaneous or independent PC and audio switching. This enables users to listen to music from one computer while simultaneously using the other computers for work or fun.

The KVM-0421 supports PC and Macintosh (MAC G3, G4, iMAC) platforms.

### One Keyboard, Mouse and Monitor controlling Two Computers

The LevelOne KVM-0421 connects four computer systems to a single USB keyboard, USB mouse and monitor. The 4-Port USB KVM Switch also provides audio support allowing users to connect the audio ports of each computer to the KVM switch.

The KVM-0421 is a Plug-and-Play KVM switch that requires no power supply and no additional software installation. Users simply connect the KVM switch to the USB mouse and keyboard and screen ports on each computer as well as the audio ports by using the included cables.

### Easy to Switch between Computers

The KVM-0421 switches between computers either through the pushbuttons located on the switch or by using keyboard hot keys. The KVM switch includes a Windows® and Mac based utility allowing users to select and monitor active PCs from their desktop as well as to configure the keyboard hotkeys for easy switching between computers.

The KVM-0421 further supports hot-plugging for easy maintenance of computers without shutting down the KVM switch or the computer. The LED display offers an "at-a-glance" status display for easy computer activity assessment.



**KVM-0421**

## Key Features

- Flexible switching for an uninterrupted multimedia experience across multi-platforms
- Control and manage four computers using a single USB keyboard and mouse and monitor
- Simultaneous and independent PC and Audio user-programmable switching
- High 2048 x 1536 pixels VGA resolution
- USB interface power supply
- Easy switching between computers with keyboard hotkeys push button and software selection
- At-a-glance LED display for easy monitoring of PC activity
- True Plug-and-Play operation without any software installation or power supply
- Windows-based switching software utility included

## Technical Specification

### Device Interface

- **PC Connections**  
4
- **PC Port Connectors**  
4x USB Type A  
4x HDB 15-pin female  
8x Audio/Mic connector
- **Console Connections**  
1
- **Console Port Connectors**  
2x USB Type A (keyboard and mouse)  
1x HDB 15-pin female  
1x 3.5mm audio jack  
1x 3.5mm mic jack
- **Cables**  
4x USB KVM Combo Cable sets  
4x USB Mini B-to-3.5mm Audio/Mic cables


### Physical Specifications

- **PC Selection**  
Push button  
Hotkey Selection  
Switching Software
- **PC Port LED**  
4 LEDs activity
- **VGA Resolution**  
2048 x 1536 pixels
- **Power Type**  
USB Interface power
- **Size**  
164mm (l) x 72mm (w) x 26mm (H)

### Certifications

- **FCC**
- **CE**

## Product Diagram

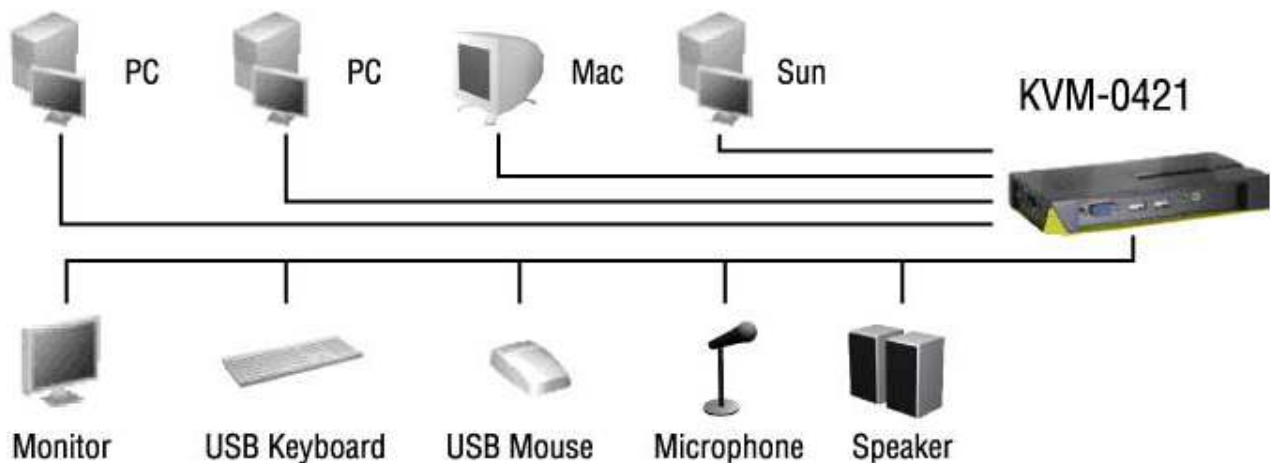

## Order Information

**KVM-0421:** 4-Port USB KVM Switch with Audio

### PACKAGE CONTENT

- KVM-0421
- KVM cable sets
- CD Manual
- Quick Installation Guide

For more information, please contact your LevelOne representative, or visit [www.level1.com](http://www.level1.com)  
All technical specifications are subject to change without notice.  
All mentioned brand names are registered trademarks and property of their owners

[www.level1.com](http://www.level1.com)