




DATE	REV	DESCRIPTION	BY	CHKD

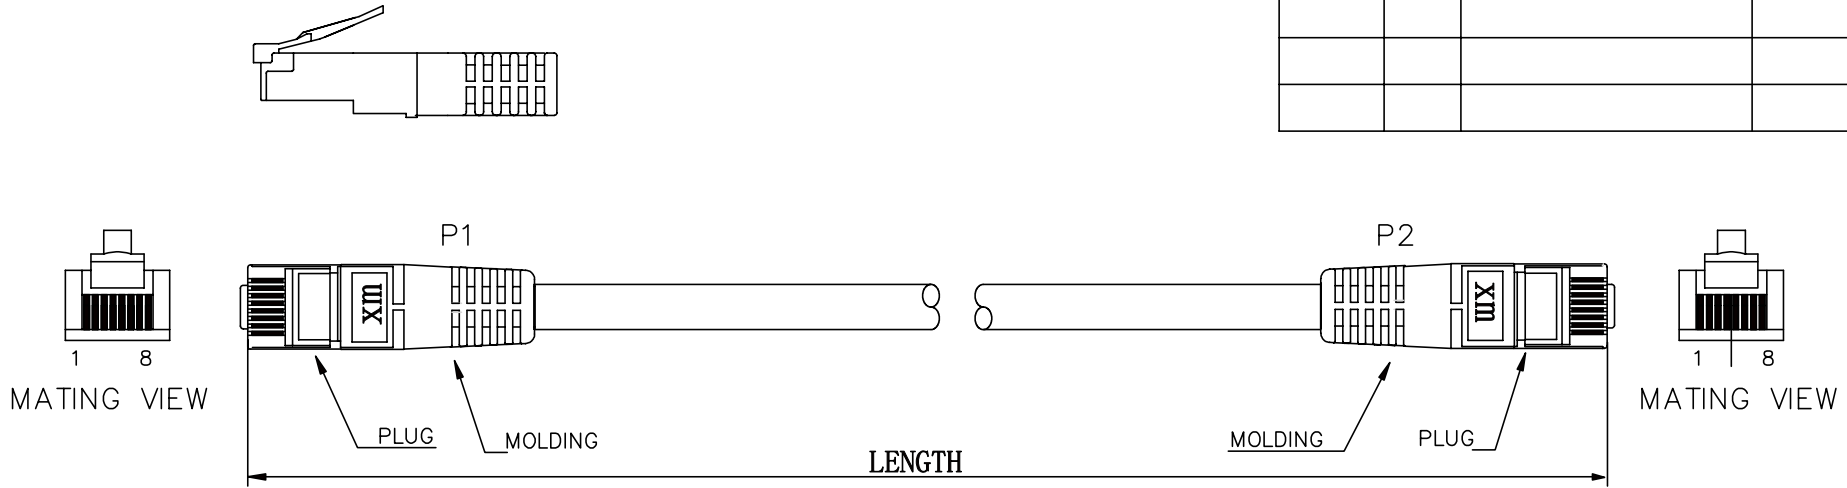

equip CAT.6A SSTP 10 GIGABIT ETHERNET  
 PATCH CABLE ISO/IEC 11801 & EN 50288 &  
 TIA/EIA-568-B.2 & IEC 332.1 26AWGX4P LSOH

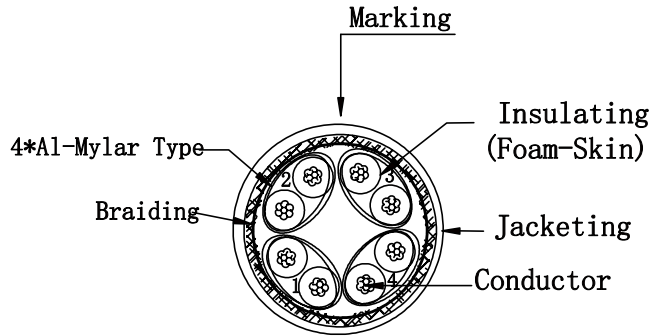


PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8



<b>Conductor</b>	Bare Copper 26AWG 7/0.16±0.005mm
<b>Insulation</b>	Thickness:MIN at any point:0.265mm MAX AVG:0.295mm Diameter:1.07±0.03mm
<b>Jacketing</b> LSOH	Thickness:MIN at any point:0.40mm MAX AVG:0.45mm Diameter:6.1±0.3mm

<b>Wire</b>	CAT. 6A PIMF STR 26AWG *4P
<b>Plug</b>	8P8C, 50μ gold plating
<b>Length</b>	0.5m, 1m, 2m, 3m, 5m, 10m, 15m, 20m
Length printing on each plug	

Unless specified on the drawing, tolerances are per the follows:  
 .X ± 1  
 .X ± 0.2  
 .XX ± 0.05



**quip®**

Patch Cable Cat. 6A SSTP (PIMF) 26 AWG,  
LSOH, white

UNIT	MM	SHEET	1	OF	1
------	----	-------	---	----	---