


SC / SC Optical Fiber Patch Cord, OM3


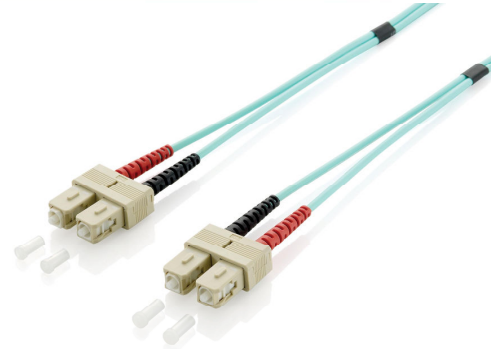


The equip[®] Optical Fiber Patch Cord is made of superior materials to ensure an end-face geometry connection with lower return loss and insertion loss. The Fiber Optic Patch Cord series comes with a comprehensive collection of lengths and connectors to fulfill your demand for the deployment.

| Key Feature

- Core diameter: 50/125 μ m
- Multi-mode, duplex
- Connector: ceramic-ferrule
- Cladding: low smoke and zero halogen
- Cable spec: I-VH 2 x 1G
- Cable jacket color: turquoise
- Each cable includes a measure protocol

| Structure

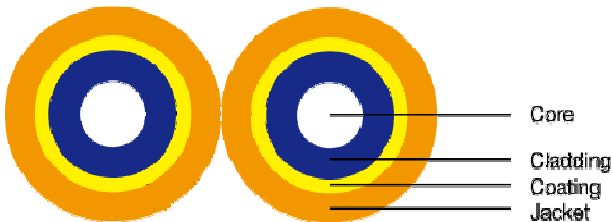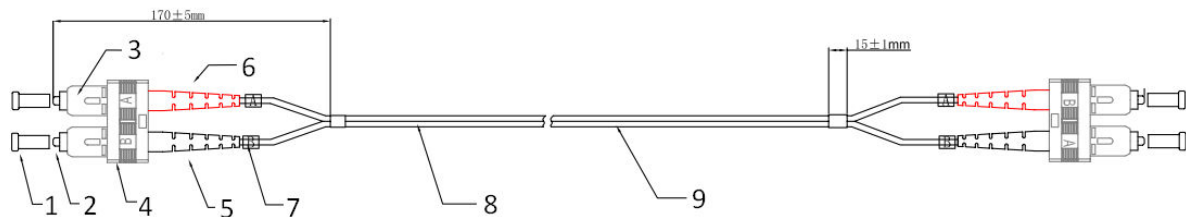

- 1 SC dust cap, white
- 2 SC/UPC multi-mode ferrule Φ 126-128 μ m
- 3 SC multi-mode connector, beige
- 4 SC clip, beige
- 5 SC 3.0 boot, black
- 6 SC 3.0 boot, red
- 7 Ring (A,B)
- 8 Heat shrink tubing, black
- 9 Optical fiber cable Φ 3.0 50/125 μ m, OM3 duplex, LSZH

| Specification

Core	50± 2.5µm (YOFC)	
Cladding	124.8 ± 1.0µm	
Bare Fiber Diameter	245 ± 7µm	
Tight Buffer Fiber Diameter	0.9 ± 0.05mm	
Tight Buffer Fiber Color	White, Orange	
Aramid yarn Kevlar (Dupont)	4 sheaf	
Max Load	Long Term	100N
	Short Term	200N
Bending Radius (cm)	Dynamic	20XD (D: Cable axis)
	Static	10XD (D: Cable axis)
Crush Resistance (N/100mm)	Long Term	100
	Short Term	500
Attenuation (dB/km)	@850nm	≤ 2.3
	@1300nm	≤ 0.6
Over Filled Launch Bandwidth (MHz/km)	@850nm	≥ 700
	@1300nm	≥ 500
Availability Bandwidth (MHz/km)	@850nm	≥ 950
	@1300nm	≥ 500

| Ordering Information

Length (meter)	PN
0.5	255329
1	255321
2	255322
3	255323
5	255325
10	255326
15	255327
20	255328

Warranty : 5 years

Packing: PE bag