



401496 Cat.6A U/UTP Installation Cable, 500MHz, 10GbE, PoE Support, LSZH, CPR Eca, 305m

Product Images

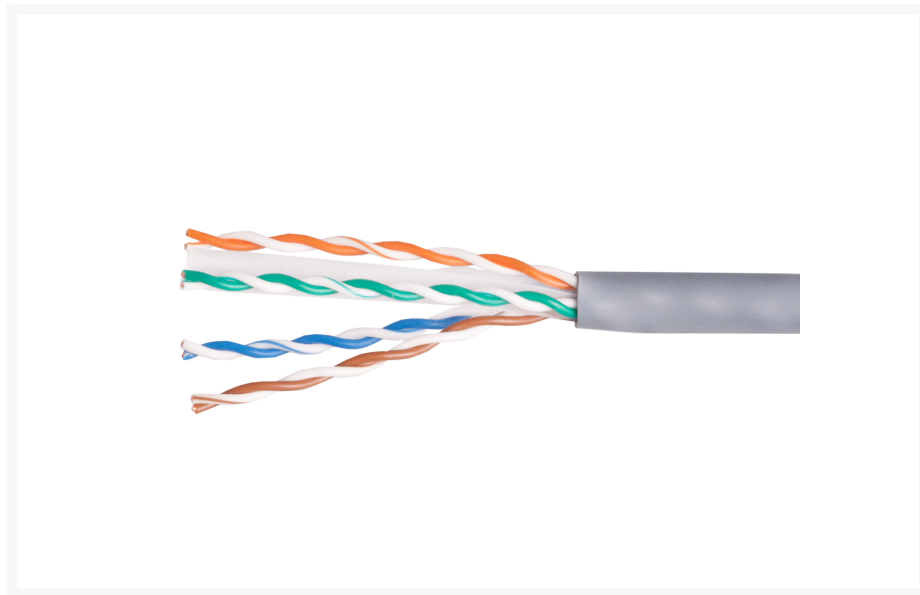

Short Description

- **Cable Category:** Cat.6A U/UTP installation cable
- **Transmission Performance:** 10GbE, up to 500MHz
- **Conductor:** Solid bare copper, AWG 23/1
- **PoE Support:** Power over Ethernet supported
- **Jacket Type:** Low Smoke Zero Halogen (LSZH/LSOH)
- **Fire Rating:** CPR Class Eca (EN 50575)
- **Compliance:** RoHS compliant
- **Color:** RAL 7047 (Grey)
- **Package:** Wooden drum
- **Length:** 305m

Description

401496 Cat.6A U/UTP Installation Cable is designed for structured cabling deployments requiring stable 10 Gigabit Ethernet performance in professional network environments.

This Cat.6A cable supports data transmission up to 10GbE with a bandwidth of 500MHz. Its U/UTP construction offers flexibility and ease of installation, making it suitable for office networks, commercial buildings, and general indoor cabling applications.

The cable is built with a solid bare copper conductor (AWG 23/1) and features a Low Smoke Zero Halogen (LSZH/LSOH) jacket. It complies with CPR fire protection Class Eca (EN 50575) and RoHS requirements, supports Power over Ethernet (PoE), and is supplied on a wooden drum for efficient installation.

Additional Information

Harmonized System (HS) code.	854449
Customs product code (TARIC).	8544499100
Shielded.	No
Shielding.	U/UTP
Approval and Compliance.	RoHS
Package Contents.	401496
Color.	Grey
EAN.	4015867202098
Model Number.	401496
Cable Length.	305m
Dimensions (W x D x H).	5 x 5 x 305000 mm
Product weight (kg).	6
CPR Certified	Eca
Category.	Cat.6A
Conductor material.	Copper
Conductor size (AWG).	23AWG
Conductor type.	Solid
Cable Jacket material.	LSZH

