


Delock PCI Express Card > 1 x 10 Gigabit LAN NBASE-T RJ45

Περιγραφή

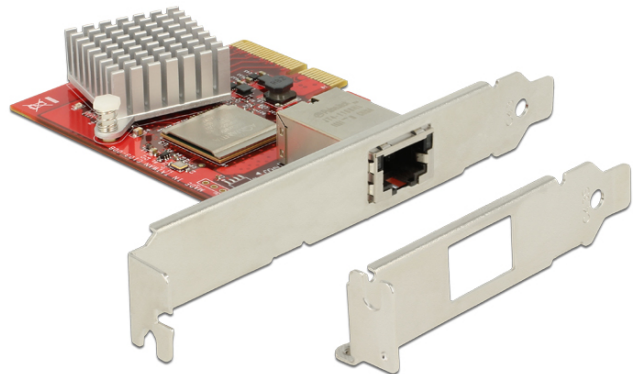

Προδιαγραφές

- Connector:
external: 1 x 10 Gigabit LAN RJ45 female
internal: 1 x PCI Express x4, V2.0
- Chipset: Tehuti TN4010
- Data transfer rate:
Fast Ethernet up to 100 Mb/s
Gigabit Ethernet up to 1 Gbps
NBASE-T (draft) with up to 2.5 Gbps and 5 Gbps
10 Gigabit Ethernet up to 10 Gbps
PCI Express x4 up to 20 Gbps
- Supports IEEE 802.3az (EEE)
- Supports 16k Jumbo frames
- Supports IEEE 802.1Q Virtual LAN (VLAN)
- Supports IEEE 802.3ad Link Aggregation

Απαιτήσεις συστήματος

- Windows Server-2008 R2/Server-2012/Server-2012 R2/
7/7-64/8/8-64/8.1/8.1-64/10/10-64, Linux Kernel 2.6.24
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Περιεχόμενα συσκευασίας

- PCI Express Karte
- Low Profile Blende
- Treiber CD
- Bedienungsanleitung

Αρ. προϊόντος 89456


EAN: 4043619894567

Χώρα προέλευσης: Taiwan, Republic of China

Συσκευασία: White Box



Εικόνες

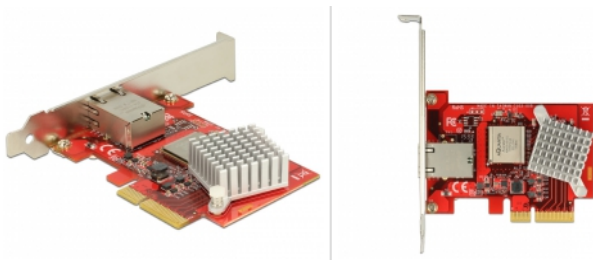



General

Supported operating system:	Linux Kernel 2.6.24
	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8 32-bit
	Windows 8 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
	Windows Server 2008 R2
	Windows Server 2012
	Windows Server 2012 R2

Interface

External:	1 x 10 Gigabit LAN RJ45 female
Internal:	1 x PCI Express x4, V2.0

Technical characteristics

Chipset:	Tehuti TN4010
Data transfer rate:	Fast Ethernet up to 100 Mbps
	Gigabit Ethernet up to 1 Gbps
	NBASE-T (Draft) with up to 2,5 Gbps and 5 Gbps
	10 Gigabit Ethernet up to 10 Gbps

Physical characteristics

Slot bracket:	low profile
	standard