

APM58 — Multi-Function Optical Power Meter




CE

- OPM with 500 trace data storage
- VFL for fast fault location
- LED light for dark environment

- Mirco USB charging
- RJ-45 net cable testing
- Build in lithium-ion battery

Structure

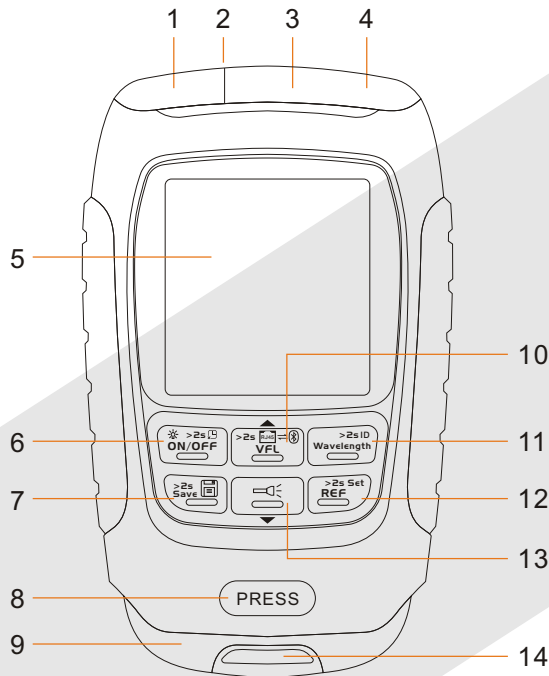

- ① Micro USB port
- ② LED
- ③ OPM connector
- ④ VFL connector
- ⑤ LCD
- ⑥ On-off / Backlight key
- ⑦ Data storage key
- ⑧ Lock of RJ-45 module
- ⑨ RJ-45 module
- ⑩ VFL / RJ-45 key
- ⑪ OPM wavelength key
- ⑫ REF key
- ⑬ LED key
- ⑭ Lanyard hole

Specification

PD Type	InGaAs
OPM Connector	2.5mm universal
Wavelength Response Range	700~1700nm
Calibrated Wavelengths	850/1300/1310/1490/1550/1625nm
Display Range	-70~+10dBm / -50~+26dBm
Resolution	0.01dB
Accuracy*	±0.2dB
Modulation Test	270//1k/2kHz
VFL Connector	2.5mm
VFL Power	10mW , 20mW or 30mW
LED	Yes
RJ-45 Cable Test	Yes
Data Storage	Yes
Battery	450mAh
Storage Temperature	-20~60℃ , <90%RH
Operating Temperature	-10~50℃ , <90%RH
Weight	100g
Size	59mm×98mm×27mm

* at 20±3℃, CW, with FC connector, -10dBm

Accessories



Host



Box



USB cable



Lanyard