




FCS-3054 Έκδοση υλικού (h/w): 1

## Fixed Dome Network Camera, 3-Megapixel, PoE 802.3af

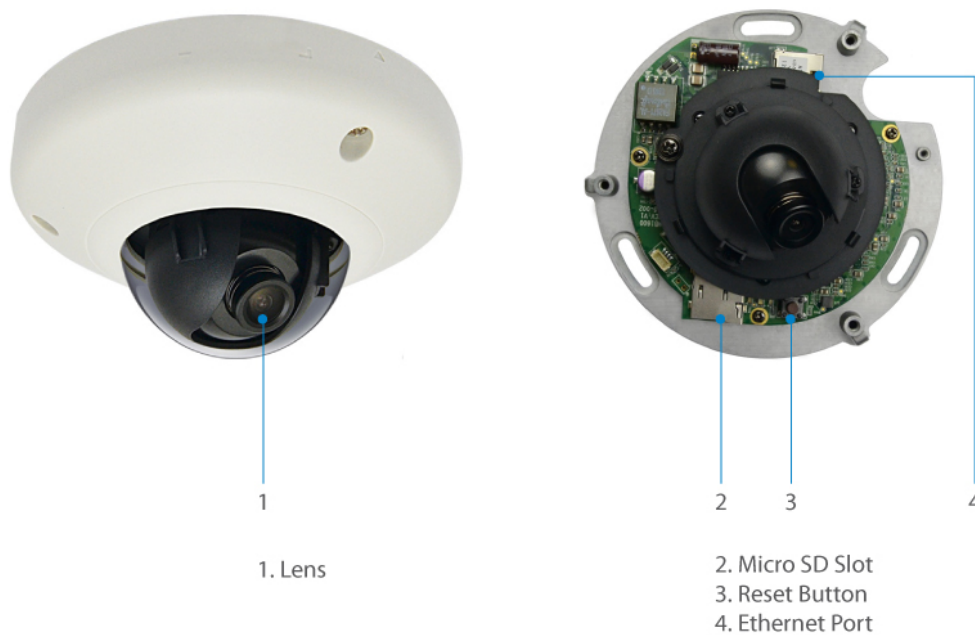

### Βασικά χαρακτηριστικά

- Ανάλυση υψηλής ευκρίνειας 3-Megapixel
- Vandal-proof IK08-rated housing
- Συμπίεση: H.264/MJPEG
- Ενσωματωμένη υποδοχή για κάρτα Micro SD/SDHC για τοπική αποθήκευση
- Power support: PoE (IEEE 802.3af)
- Συμπεριλαμβάνεται δωρεάν λογισμικό παρακολούθησης 64-καναλιών (υποστηρίζει OneSecure App)

### Προδιαγραφές

#### System Specifications

**Image Sensor:**

3-Megapixel 1/3.2" Progressive Scan CMOS

**Connectors and Cabling:**

1 x RJ-45 10/100 Mbps PoE port

**Modularity:**

1 x MicroSDHC/ MicroSDXC card slot

**Button:**

Reset Button

**Indicator:**

Power

**Lens:**

Fixed focal, Fixed iris, Fixed focus, f2.93mm , F2.0

**Shutter Time:**

1/5 ~ 1/10,000 sec

**Angle of View:**

83.3°

**Pan/Tilt/Zoom:**

Digital Zoom to very high detail available on Software

**Video Compression:**

H.264 Hihg Profile / MJPEG

**Resolution:**

3M(2048 x 1536)

**Video Format:**

RAW

**Audio Compression:**

G.711

**Power:**

Power Consumption: PoE Class 1 (IEEE802.3af) / 2.91W

Power Input: 802.3af PoE

**Standards & Protocols:**

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

IEEE 802.1X Network Access Control

TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP,

UPnP, SNMP, Bonjour

## Features

**General:**

Backup: MicroSDHC /MicroSDXC card slot for local storage

**Video:**

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- ACG/AWB/AES

- Back Light Compensation (BLC)

- 2D Noise Reduction (2DNR)

## Performance

### Data Transfer Rate:

10/100Mbps

### Frame Rate:

15 fps at 2048 x 1536; 30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 640 x 480; 15 fps at 320 x 240

### Minimum illumination:

Color: 0.1 lux at F2.0

## Environment

### Temperature (°C):

Operating: -10°C ~ 50°C

### Humidity (Non-condensing):

Operating: 10% ~ 85%

## Physical Specifications

### Dimensions (W x D x H mm):

110 x 58 x 110

### Weight (g):

202 g

### Enclosure:

Vandal Resistant IK08-reted

## Others

### Approval and Compliance:

CE, FCC, IK08


### Deployment:

Wall/Ceiling Mount

### Operation Systems:

Microsoft Windows 8/7/Vista/XP

## Διάγραμμα

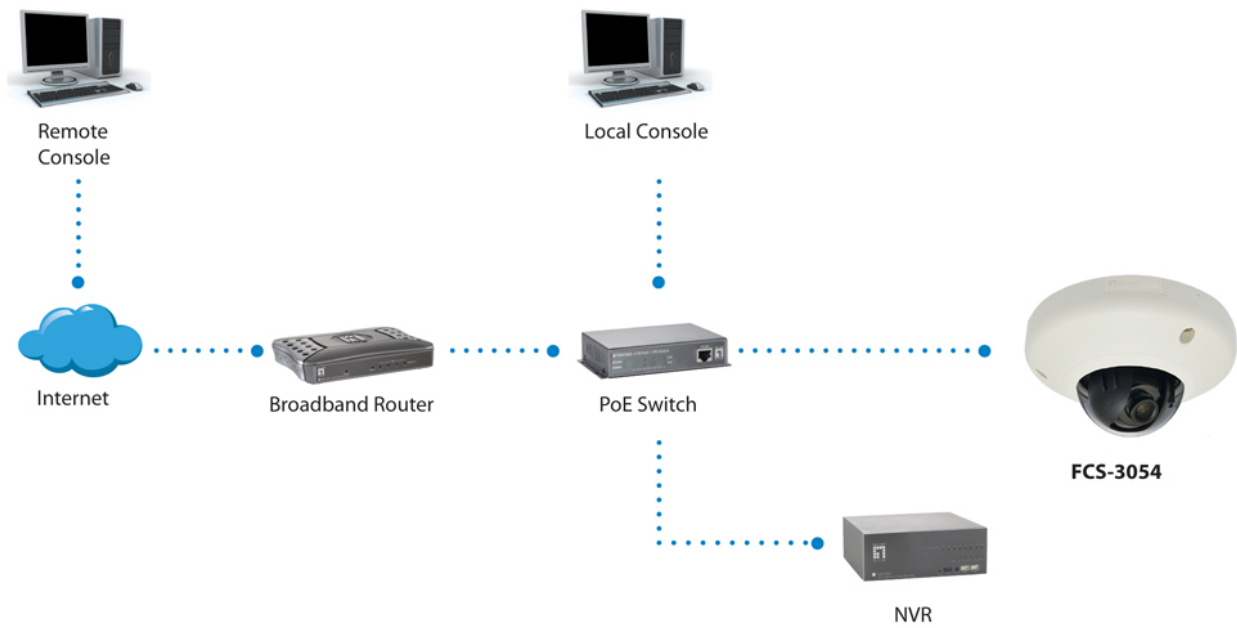

---

## Order Information

FCS-3054

---

## Περιεχόμενα συσκευασίας

Mounting Kit  
Screw Kit  
Quick Installation Guide  
Resource CD (User Manual, Utility, QIG)

All mentioned brand names are registered trademarks and property of their owners.  
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.