




FCS-3065 Έκδοση υλικού (h/w): 1

Fixed Dome Network Camera, 5-Megapixel, PoE 802.3af, WDR

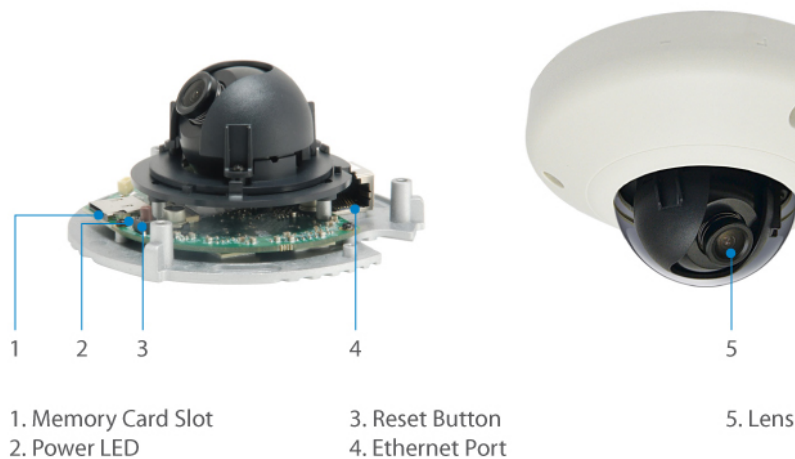

Βασικά χαρακτηριστικά

- Ανάλυση υψηλής ευκρίνειας 5-Megapixel (2592 x 1944)
- Διαθέτει λειτουργία WDR (Wide Dynamic Range) για ενίσχυση της ορατότητας σε εξαιρετικά φωτεινό ή σκοτεινό περιβάλλον
- Vandal-proof IK08-rated housing
- Συμπίεση: H.264/MJPEG
- Ενσωματωμένη υποδοχή για κάρτα Micro SD/SDHC για τοπική αποθήκευση
- Power support: PoE (IEEE 802.3af)
- Συμπεριλαμβάνεται δωρεάν λογισμικό παρακολούθησης 64-καναλιών (υποστηρίζει OneSecure App)

Προδιαγραφές

System Specifications

Image Sensor:

5-Megapixel 1/3.2" Progressive Scan CMOS

Connectors and Cabling:

1 x RJ-45 10/100 Mbps PoE port

Modularity:



1 x MicroSDHC/ MicroSDXC card slot

Button:

Reset Button

Indicator:

Power

Lens:

Fixed focal, Fixed iris, Fixed focus, f1.9mm, F2.8

Shutter Time:

1/5 ~ 1/10,000 sec

Angle of View:

126.9° (overview area), 77.4° (high detail area)

Pan/Tilt/Zoom:

Digital Zoom to very high detail available on Software

Video Compression:

H.264 Hihg Profile / MJPEG

Resolution:

5M(2592 x 1944)

Video Format:

RAW

Audio Compression:

G.711

Power:

Power Consumption: PoE Class 1 (IEEE802.3af) / 2.91 W

Power Input: 802.3af PoE

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

IEEE 802.1X Network Access Control

TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP,

UPnP, SNMP, Bonjour

Features

General:

Backup: MicroSDHC /MicroSDXC card slot for local storage

Video:

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- ACG/AWB/AES

- Back Light Compensation (BLC)

- Wide Dynamic Range (WDR), Basic WDR (74 dB)

- 2D Noise Reduction (2DNR)

Performance

Data Transfer Rate:

10/100Mbps

Frame Rate:

15 fps at 2592 x 1944; 15 fps at 2048 x 1536; 30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 640 x 480; 15 fps at 320 x 240

Minimum illumination:

Color: 0.1 lux at F2.8

Environment

Temperature (°C):

Operating: -10°C ~ 50°C

Humidity (Non-condensing):

Operating: 10% ~ 85%

Physical Specifications

Dimensions (W x D x H mm):

110 x 58 x 110

Weight (g):

191 g

Enclosure:

Vandal Resistant IK08-reted

Others

Approval and Compliance:

CE, FCC, ONVIF, IK08


Deployment:

Wall/Ceiling Mount

Operation Systems:

Microsoft Windows 8/7/Vista/XP

Διάγραμμα

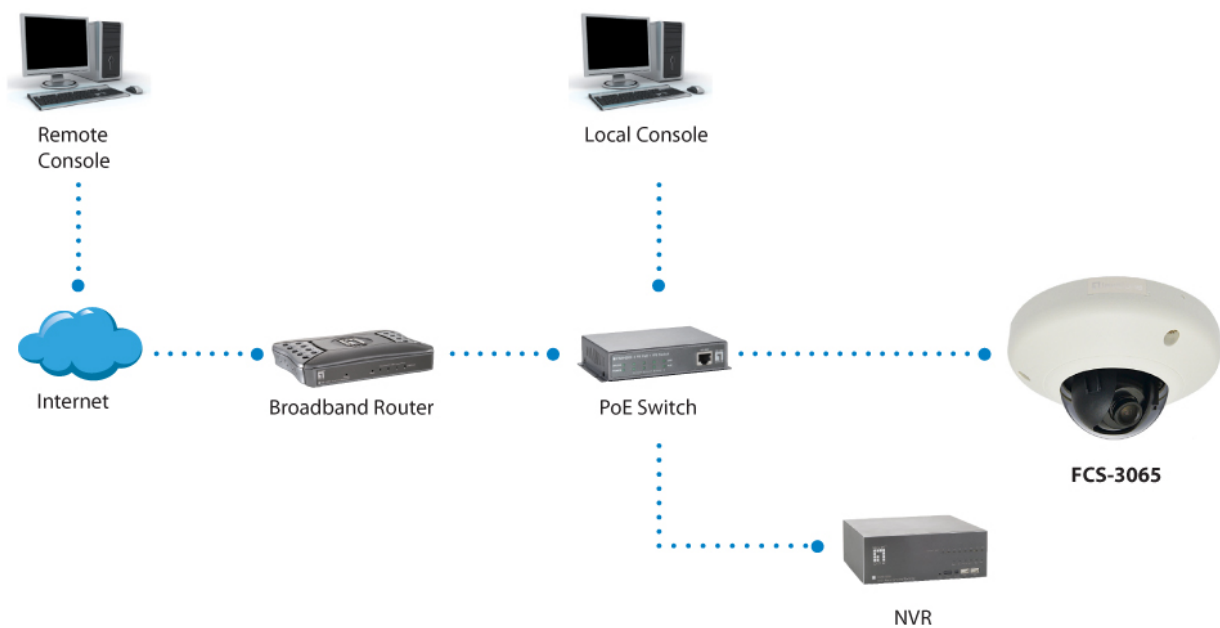

Order Information

FCS-3065



Περιεχόμενα συσκευασίας

Mounting Kit
Screw Kit
Quick Installation Guide
Resource CD (User Manual, Utility, QIG)

All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.