



FCS-5042 Έκδοση υλικού (h/w): 1

## 2-Megapixel Day/Night PoE Outdoor Network Camera

The LevelOne FCS-5042 is the perfect solution for day/night surveillance installations such as school campuses, railway stations and parking lots. The bullet network surveillance camera features a 2-megapixel lens with 10x optical zoom, and is housed in an ultra-secure IP66-rated weatherproof casing. High power infrared LEDs (30m) give the camera excellent visual performance at night, coupled with 3DNR (3-Dimension Noise Reduction) and WDR (Wide Dynamic Range) which produce highly reliable, crystal-clear images under any conditions. It also equipped with a BNC connector for attaching the camera directly to an analog monitor, IR-cut filter, a built-in Micro SD/SDHC card and 10 motion-detection zones. The device also offers flexible installation, supporting three power options (12 VDC/24 VAC/PoE) and a mounting bracket. The FCS-5042 is an absolutely premium choice for reliable and high performance surveillance.



### Βασικά χαρακτηριστικά

- Ανάλυση υψηλής ευκρίνειας 2-Megapixel (1920 x 1080)
- Υποστηρίζεται 10x οπτικό ζουμ
- Ενσωματωμένες λυχνίες LED υπέρυθρων για προβολή τη νύχτα με κάλυψη έως και 30m
- Συμπίεση: H.264/MPEG-4/MJPEG
- Αφαιρούμενο φίλτρο αποκοπής υπέρυθρης ακτινοβολίας (IR-cut) για έλεγχο κατά τη διάρκεια μέρας και νύχτας
- Ενσωματωμένη υποδοχή για κάρτα Micro SD/SDHC για τοπική αποθήκευση



- Διπλή τροφοδοσία: 12VDC/PoE (IEEE 802.3af)
- Συμπεριλαμβάνεται δωρεάν λογισμικό παρακολούθησης 64-καναλιών (υποστηρίζει iCamSecure App)

---

## Προδιαγραφές

### System Specifications

#### Image Sensor:

2-Megapixel 1/2.7" Progressive Scan CMOS

#### Connectors and Cabling:

1 x RJ-45 10/100 Mbps PoE port

1 x DC Power Jack

1 x 3.5mm line out

1 x 3.5mm mic/line in

1 x power terminal block

1 x BNC analog video output

#### Modularity:

1 x MicroSD/SDHC card slot

#### Button:

Reset Button

#### Indicator:

Link/ Act

#### Lens:

10X optical zoom lens, varifocal, f=4.9 ~ 49 mm, F1.8 ~ 3.0

#### IR Cut Filter:

Removable infrared-cut filter for day & night function

#### IR LED:

4 high power IR LEDs for illumination up to 30m

#### Shutter Time:

1~ 1/10,000 sec.

#### Angle of View:

Fov(D), 66.6° ~ 7.2°

#### Pan/Tilt/Zoom:

10x optical zoom

4x digital zoom

#### Video Compression:

H.264 / MPEG4 / MJPEG

#### Resolution:

1080p (1920x1080) / SXGA (1280x1024) / WXGA (1280x800) / VGA (640x480) / QVGA (320x240) / QCIF (176x144)

#### Video Format:

MPEG4

#### Audio Compression:

G.711 / AMR / AAC

#### Power:

Power Consumption: 10W

Power Input: DC12V 1.5A / 802.3af PoE

#### Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

TCP/IP, HTTP, SMTP, FTP, DDNS, UPnP, Telnet, NTP, PPPoE, DNS, DHCP, RTSP, Samba

## Features

### General:

Backup: MicroSD/SDHC card slot for local storage

### Security:

Alarm and Notification: Alarm: Motion Detection; Notification: FTP, SMTP, Samba

Access Control: Multi-level user access with password protection

IP address filtering

HTTPS encrypted data transmission

### Video:

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- AGC/AWB/AEC

- Wide Dynamic Range (WDR)

- Flip & Mirror

- Time Stamp

Streaming: Up to 2 video streams

### Audio:

Streaming: 2-way audio

Input/Output: External microphone

## Performance

### Number of Clients:

16

### Data Transfer Rate:

10/100Mbps

### Frame Rate:

Up to 25 fps at 1920x1080

### Minimum illumination:

Color: 1.0 lux at F2.0

B/W: 1.0 lux at F2.0

## Environment

### Temperature (°C):

Operating: -20°C ~ 50°C

### Humidity (Non-condensing):

Operating: 10% ~ 85%

## Physical Specifications

### Dimensions (W x D x H mm):

75 x 165 x 75mm

### Weight (g):

800 g

### Enclosure:

Weatherproof IP66-rated housing

## Others

### Approval and Compliance:

CE, FCC

### Deployment:

Wall/Ceiling Mount



#### Operation Systems:

Microsoft Windows 7/Vista/XP/windows8

#### Viewing System Requirements:

Browser: Internet Explorer 6.x or above, Firefox, Chrome, Safari


Cell phone: 3GPP player

Real Player: 10.5 or above

Quick Time 6.5 or above

---

### Διάγραμμα

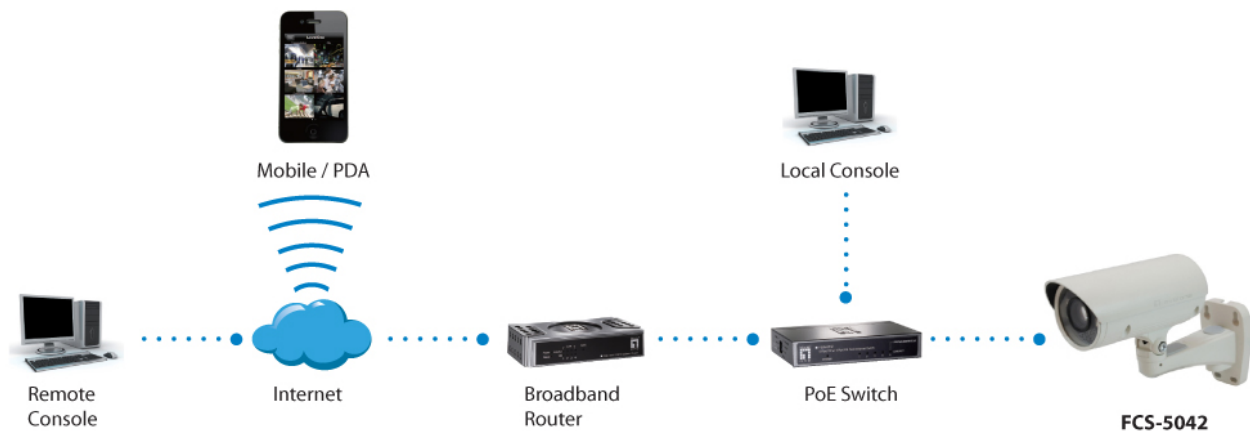

---

### Order Information

FCS-5042

---

### Περιεχόμενα συσκευασίας

Power Adapter

Mounting Kit

Screw Kit

Quick Installation Guide

Resource CD (User Manual, Utility, 64-CH Monitoring Software)

All mentioned brand names are registered trademarks and property of their owners.  
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.