



FCS-5059 Έκδοση υλικού (h/w): 1

Fixed Network Camera, 2-Megapixel, Ημέρα/νύχτα, Outdoor, IR LEDs, WDR, two-way audio, 802.3af PoE, Varifocal

Βασικά χαρακτηριστικά

- Ανάλυση υψηλής ευκρίνειας 2-Megapixel (1920 x 1080)
- Συμπίεση: H.264/MJPEG
- Διαθέτει λειτουργία WDR (Wide Dynamic Range) για ενίσχυση της ορατότητας σε εξαιρετικά φωτεινό η σκοτεινό περιβάλλον
- Ενσωματωμένες λυχνίες LED υπέρυθρων για προβολή τη νύχτα με κάλυψη έως και 30m
- Ψηφιακή είσοδος/έξοδος (1DI/1DO) για αισθητήρα και ειδοποίηση
- Power support: PoE (IEEE 802.3af)
- Αδιάβροχη IP66 με ευρύ φάσμα θερμοκρασιών λειτουργίας (-30°C έως 60°C) για αντίξοες συνθήκες
- 2,8 ~ 12 mm ρυθμιζόμενο μήκος πολυεστιακού φακού (Vari-focal) για έλεγχο με πλάνο ευρείας γωνίας

Προδιαγραφές

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS

Image Sensor:

1/2.8" Progressive Scan CMOS

Connectors and Cabling:

Power connector

10/100Mbps RJ45 Ethernet interface

1Vp-p composite output (75 Ω/BNC)

I/O terminal block (1 DI/1 DO)

Audio:In/Out

Button/Knob:

Reset button

**Lens:**

2.8 - 12 mm @ F1.4

IR Cut Filter:

Yes

IR LED:

IR LEDs for illumination up to 30m

Shutter Time:

1/3s ~ 1/10,000s

Video Compression:

H.264/MJPEG/H.264+

Resolution:

2-Megapixel(1920 x 1080)

Video Format:

AVI

Audio Compression:

G.711/G.722.1/G.726/MP2L2

Power Input:

PoE (IEEE 802.3af)

12V DC±10%

Power Consumption:

Max.5.5W(Max. 7.5 W with IR cut filter on)

Features

PoE:

PoE (IEEE 802.3af)

Security:

One-key reset, flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, anonymous access

Video:

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- AGC/AWB/AES

- Back Light Compensation (BLC)

- Wide Dynamic Range (WDR)120dB

- 3D Noise Reduction (3DNR)

- Flip & Mirror

- Portrait Mode

- Privacy Mask

- Time Stamp and Text Caption Overlay

Image Layout:

Streaming: Up to 2 video streams

Motion Detection: 3 Detection Zones

Audio:

G.711/G.722.1/G.726/MP2L2

64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)

Performance

Number of Clients:

20

Data Transfer Rate:

10/100Mbps

Storage Capacity:

Built-in Micro SD/SDHC/SDXC card slot, up to 128 GB

Frame Rate:

50Hz: 25fps(1920 × 1080, 1280 × 960, 1280 × 720)

60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)

Minimum illumination:

0.01Lux @(F1.2,AGC ON), 0.014 Lux @(F1.4,AGC ON), 0 Lux with IR

Environment

Temperature (°C):

-30 °C ~ 60 °C (-22 °F – 140 °F)

Humidity (Non-condensing):

Humidity 95% or less (non-condensing)

Deployment:

Cable Management Bracket for Wall/Ceiling Mount

Physical Specifications

Dimensions (W x D x H mm):

95×105×258.6 mm (3.74" × 4.13" × 10.18")

Weight (g):

1200

Color:

White

Approval and Compliance

EMI/EMS:

CE,FCC

Environmental Test:

Weather proof IP66-rated housing

Others:

ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI

Others

Operation Systems:


Windows 7/8/10/

Viewing Systems:

Above IE9 browser



Διάγραμμα

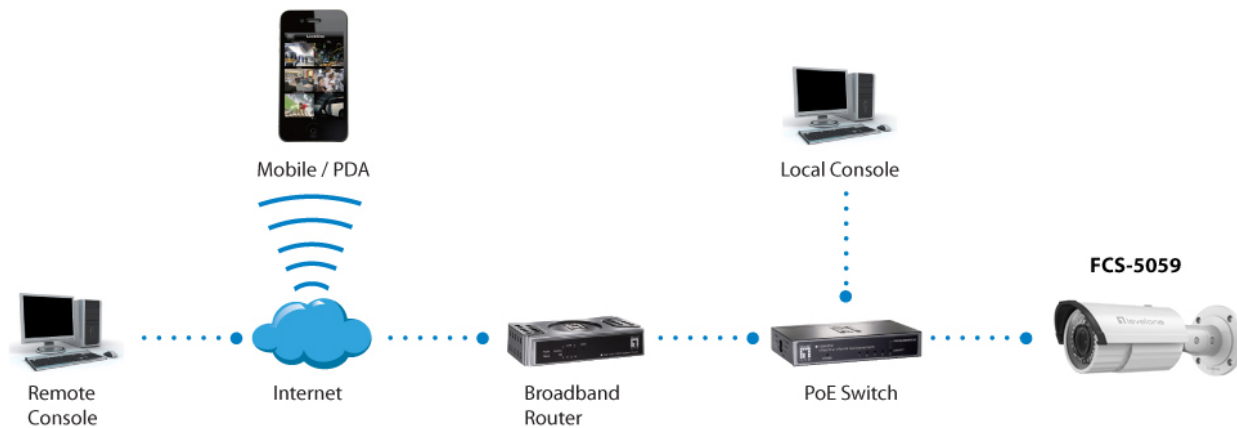

Order Information

FCS-5059

Περιεχόμενα συσκευασίας

FCS-5059

Resource CD (User Manual, Utility, 64-CH Monitoring Software)

Screw Kit

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.