



GVM-1220 Έκδοση υλικού (h/w): 1

RJ45 to SC Managed Gigabit Media Converter, Single-Mode Fiber, 20km

GVM-1220 series is remote Managed Gigabit Ethernet fiber media converter with OAM functions developed by our company. It can convert Ethernet signal between 10/100/1000Base-T and 1000Base-X, It supports both half-duplex and full-duplex operations and a variety of fiber options. It is double fiber, single mode, 20km media converter

Remote devices can be managed by fiber-connected OAM media converter or OAM switch when deployed as a stand-alone solution. It incorporates an easy to use Web user interface for operation, administration and maintenance, both locally and remotely. By offering IEEE802.3ah OAM compliance, this converter can be linked to any IEEE802.3ah compliant fiber switch and support loop back and dying gasp functions. All functions of this converter and the remotely connected converter can be configured and monitored via Web management, including bandwidth control, duplex, speed and VLAN configuration.

Βασικά χαρακτηριστικά

- Ο έλεγχος ροής IEEE 802.3x παρέχει προστασία ενάντια στην απώλεια πακέτων για αξιόπιστη μετάδοση δεδομένων
- Web-based and SNMP Management
- Built-in LFP (Link Fault Pass-through) (LLCF/LLR) Technology
- Supports VLAN (tag-based, Q-in-Q)

Προδιαγραφές

System Specifications

Standards & Protocols:

IEEE802.3 10Base-T Ethernet
IEEE802.3u 100Base-TX Fast Ethernet
IEEE802.3ab 1000Base-T Giga Ethernet
IEEE802.3z 1000Base-X Giga Ethernet
IEEE802.3x Flow Control
IEEE802.3ah OAM

Connectors and Cabling:

1 x RJ45 Ethernet port,
1 x SC/ST/FC fiber connector

Wavelength(nm):

1310nm

**Indicator:**

PWR (power supply),
FX LINK/ACT (optical link action)
FDX (full duplex),
TX LINK/ACT (TP cable link/action)
TX SPD (TP cable rate),
LFP(LFP function enable/disable)

Transmission Method:

store and forward or cut-through by software configure

Power:

internal: 100~240VAC in, 5V@2A output

Features

General:

1. 10/100/1000Mbps auto-sensed, facilitating network upgrade
2. Support LFP function
3. Built-in efficient switching core to implement flow control and reduce broadcast packets
4. Full-duplex and half-duplex auto-sensed
5. Support SC/ST/FC connector
6. Support Jumbo frame up to 9k bytes
7. Support Q-in-Q function, Optical port and Ethernet port can be set separately as dual Tag ports, and can be set as ISP Tag and ISP Tag TPID
8. Support configure the operation mode of each port on local and remote devices, including port speed, full/half-duplex, and flow control, etc, and can display the real-time status of each port
9. Support bandwidth-limiting function: with the step of 64kps, the bandwidth can be set between 0Mbps and 1000Mbps
10. Support 4 kinds of 802.3ah OAM functions: Discover of OAM, MIB variable response, OAM Loopback, Dying Gasp alarm
11. Offer MIB library files, support OpenView/Snmpc, and other softwares

Performance

Operating Distance:

20km

Environment

Temperature (°C):

-10~55

Humidity (Non-condensing):

5%~90% non-condensing

Physical Specifications

Dimensions (W x D x H mm):

127mm×156mm×32mm

Weight (g):

720

Others

Approval and Compliance:

CE, RoHS, FCC


Deployment:

Desk, Wall mounted

Διάγραμμα

Dimension Diagram

— Cat.5 UTP
= Fiber

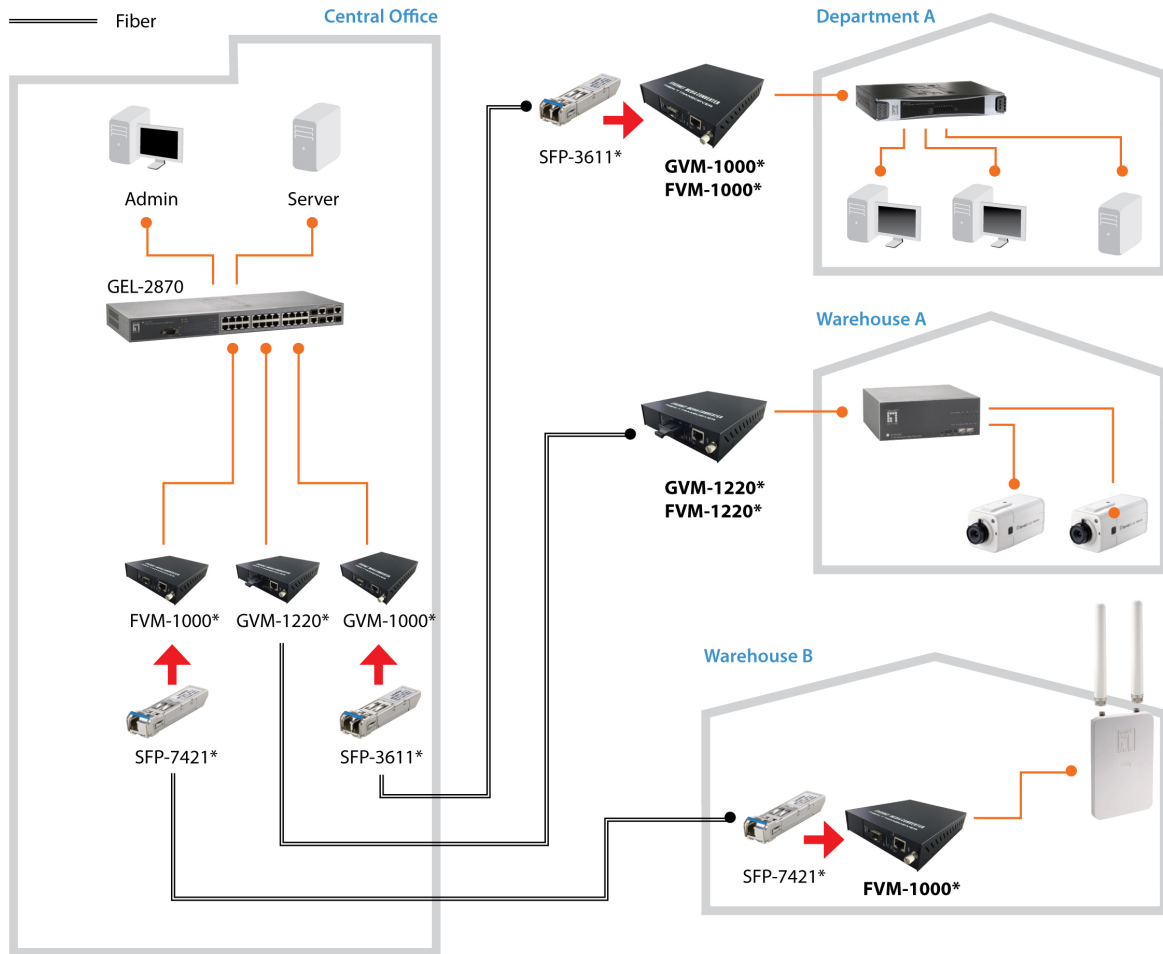

*In above example diagram, converter modules at local and remote ends should be paired for proper connectivity, and the distance mainly depends on cable and transceiver selection accordingly.

Order Information

GVM-1220

Περιεχόμενα συσκευασίας

GVM-1220

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.