


LTR	REV.	DESCRIPTION	DATE

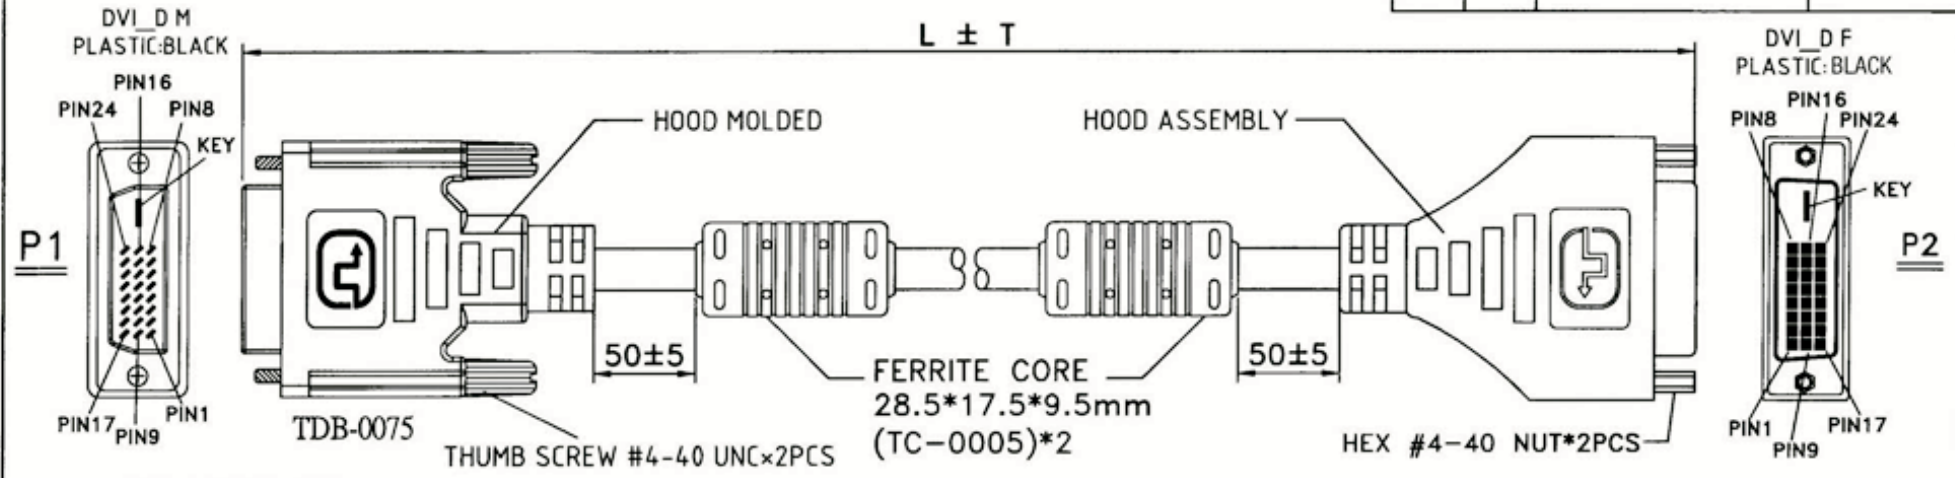

WIRE CONNECTION

P1	WIRE COLOR	P2
1		1
2		2
3		3
3		3
4		4
5		5
6		6
7		7
9		9
10		10
11		11
11		11
12		12
13		13
14		14
15		15
16		16
17		17
18		18
19		19
19		19
20		20
21		21
22		22
23		23
24		24
SHELL	BRAID SHIELDS	SHELL

REMARK:

- CABLE:[30AWG(7/0.102)×1P+DRAIN WIRE+AL/MY+MY]×7C+30AWG(7/0.102)T.C×1P+30AWG(7/0.102)×3C +AL/MYLAR+(24/5/0.12) BRAID]+JACKET:PVC OD: 8.6±0.2mm UL20276 APPROVED. COLOR:BLACK
- CONNECTOR:
 P1:DVI_D 25P: 24P+KEY MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL.
 P2:DVI_D 25P: 24P+KEY FEMALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- SHIELD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
- HOOD: P1:MOLDED TYPE, PVC 45P, COLOR:BLACK
 P2:ASS'Y TYPE, COLOR:BLACK
- TEST REQUEST:
 (1) 100% SHORT OPEN & MIS WIRE TEST.
 (2) CONTACT RESISITANCE 3 OHMS MAX.
 (3) INSULATION RESISITANCE 20M OHMS MIN.
 (4) HI-POT VOLTAGE: 300V DC.
- PACKING:EACH PC / e'quip ZIP BAG + BAR CODE LABEL

200-0182-4	10000	50	250 x 335mm
200-0182-3	5000	50	200 x 330mm
200-0182-2	3000	30	200 x 330mm
200-0182-1	1800	30	175 x 275mm
DWG	L (mm)	T (mm)	ZIP BAG SIZE

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

www.equip-info.net

Title
DVI_D - DVI_D DUAL LINK EXTENSION CABLE

Draw
AMY 02/12/04

Customer P/N

Check
App'd _____ Customer _____

Engr
Scale NONE Units m/m Third Angle Projection

Dwg No. 200-0182 REF: I Sheet 1/1