


WALL-MOUNTED OPTICAL DISTRIBUTION BOX

EN The **Box** is designed for termination of 2 to 4 optical fibers in a customer terminal point or for interconnection of optical cables. It can be connected to a PC, different peripheral equipment or to another equipment via optical patchcords. The distributor is designed for indoor wall mounting. Inputs and outputs can vary by used panels.

- Capacity 4 optical connectors
- Connector holder SC simplex, SC duplex, ST, FC, E2000, LC
- Maximum capacity is 6 optical splices
- Direct fiber termination by a connector
- Easy assembly
- Wall-mounted
- Coverage degree IP 20
- Use for fibers G652d and G657 a, b

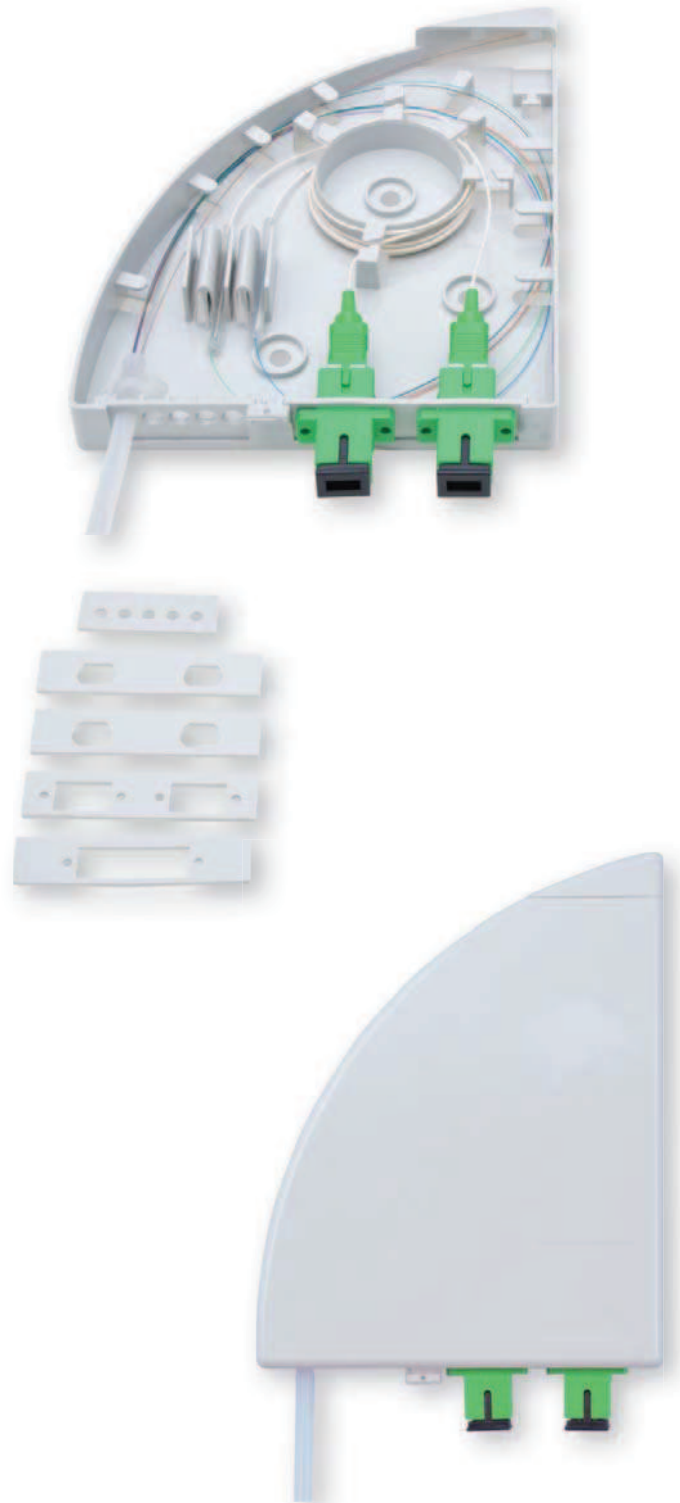

TECHNICAL SPECIFICATIONS

Inputs	Micro duct \varnothing 5 mm Micro duct \varnothing 3 mm Optical cable maximum \varnothing 5 mm
Outputs	Adapters SC simplex, SC duplex, ST, FC, E2000, LC
Coverage degree	IP 20 to EN 60529
Self-extinguishing degree	VO according to UL 94
Impact protection degree	IK 04 to EN 50102
Colour	Light grey RAL 7035
Material	ABS
Dimensions	140 × 109 × 23 mm
Weight	0.1 kg