

## Cat.6A Keystone Jack STP, Slim Type

Art no.: NK4019

### Technical Features

PrimeLine Cat.6A Class EA, 500 MHz


AWG 22–26, suitable for cable Ø6–8,5 mm

180° toolless, width only 14,8 mm

Cat.6A Channel Link certified

Suitable for PoE, PoE+ and PoE++ applications

### Technical Drawing

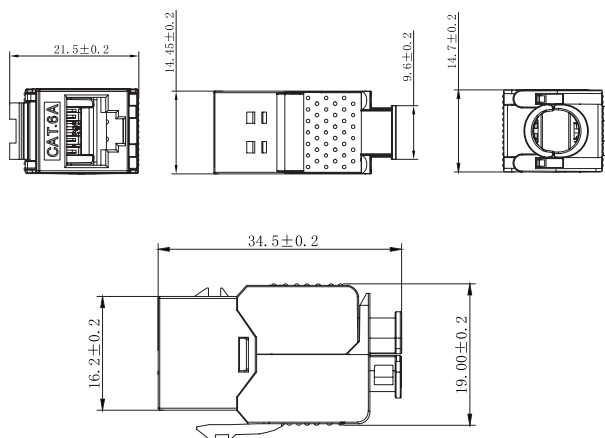

#### Electrical:

1. Contact resistance: 20 MΩ max.
2. Insulation resistance: 500 MΩ min. @ 500 V DC
3. Withstand voltage: DC 1000 V AC 700 V RMS 60 Hz, 1 min
4. Component testing for Cat.6A to ISO/IEC 11801 Ed.2.2:2011-06  
DIN EN 50173-1:2011-09  
TIA/EIA-568-C.2 (2009-08)  
IEC 60603-7-5 Ed.1 (12/2008)
5. Compliance with Class EA up to 500 MHz to ISO/IEC 11801 Ed.2.2:2011-06  
DIN EN 50173-1:2011-09

#### Environmental:

1. Storage temperature: -40–70°C
2. Operation temperature : -10–60°C

#### Mechanical:

1. Shield Material: Zinc Alloy (Silver)
2. IDC Material: PC Terminal: Phosphor Bronze, Tin Plating
3. RJ45 Contact Life: 750 Times Min
4. Plug force: <30N
5. Solid cable: 1/22 AWG(0,65 mm)-1/26 AWG(0,4 mm) ID: 1,05–1,5 mm
6. Cable OD: 6–8,5 mm
7. PoE per IEEE 802.3af, PoE+ per IEEE 802.3at
8. 360° Shield connection

NK4019



4 052792 060256

Made in China

www.2direct.de




\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.

## Package Content

Cat.6A Keystone Jack STP, Slim Type x 1

## Packaging Information

Packing Dimension	120 x 80 mm
Packing Weight	0,0185 kg
Carton Dimension	475 x 275 x 200 mm
Carton Q'ty	250 pcs
Carton Weight	6 kg

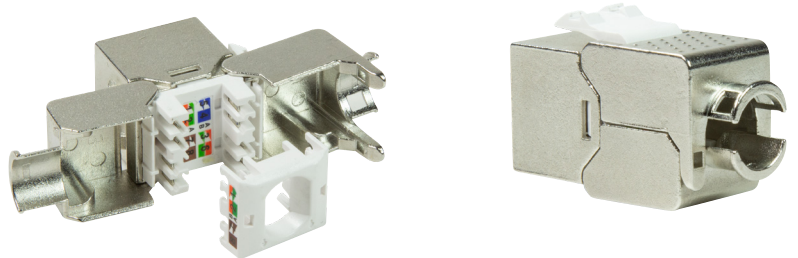

NK4019



4 052792 060256

Made in China

[www.2direct.de](http://www.2direct.de)



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.