

6


5

4





3

2

1

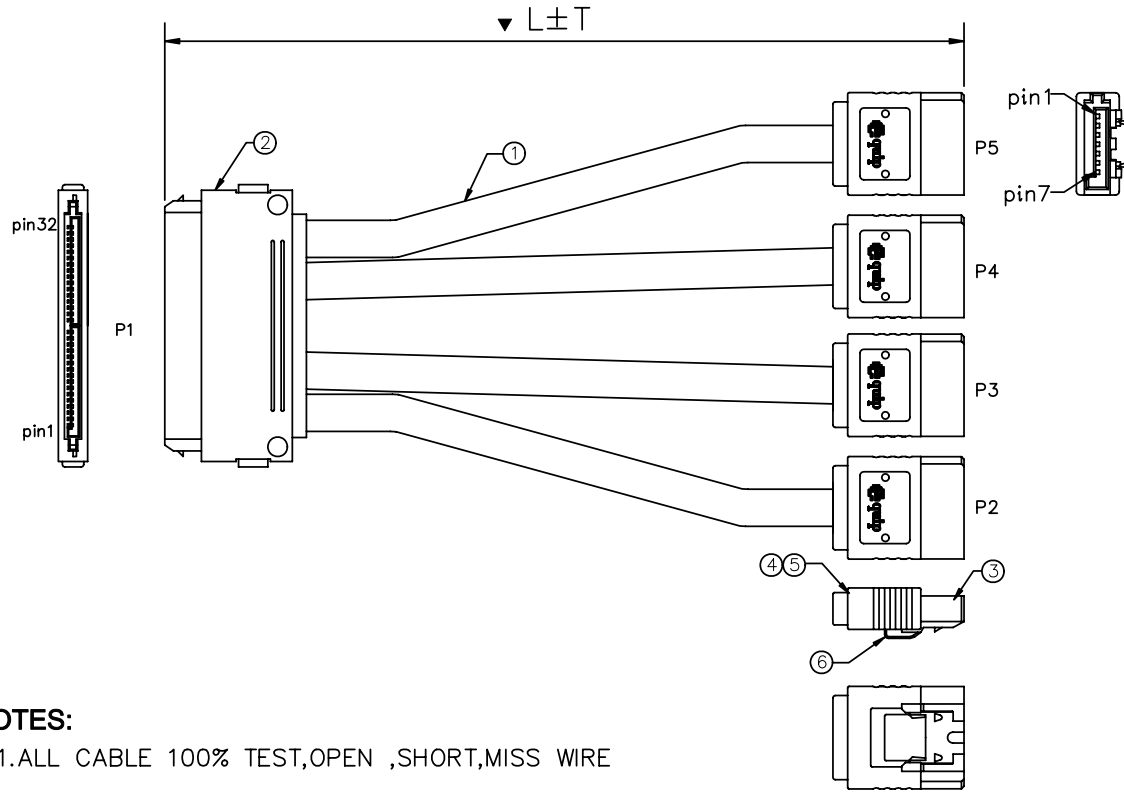

## PIN ASSIGNMENT



## NOTES:

1. ALL CABLE 100% TEST, OPEN, SHORT, MISS WIRE
2. CONDUCTOR RESISTANCE: 2.0 ohm Max
3. INSULATION RESISTANCE: 10 Mohm/300VDC/10ms Min

Item No.	L±T(mm)
111845	500±10(mm)
111841	1000±20(mm)

⑥	PVC	020-0005-1001	WANFU: 45P PVC BLACK	4pcs
⑤	PVC	901-0042-0006	WANFU: 45P PVC BLACK	A/R
④	PE	901-0021-0006	WANFU: PE	A/R
③	CONN	070-0006-0007	SATA 7PIN II BLACK,	4pcs
②	CONN	TBD	Viconn: SAS32P BLACK	1set
①	CABLE	015-2001-0103	SERIAL ATA CABLE UL21149 & UL2725 [(26AWG*2C+AE)+2D.W]*2F RED	A/R
No	Packing	equip zip bag/pc	Cooper Purity > 99,99%	Q'TY

.X±	X°±
.XX±	.X°±
.XXX±	.XX°±
UNIT	mm



SATA Multi Lane + SAS Cable

1x SAS 32pin -&gt; 4x SATA 7pin w/metal latch

6

5

4

3

2

1