


SFP-3611 Version: 3

1.25Gbps Single-mode SFP Transceiver, 80km, 1550nm

LevelOne SFP-3611 is a high performance and cost-effective single-mode SFP transceiver. Intended for use with Gigabit Ethernet, it provides up to 1.25 Gbps bi-directional data transfer rate on a single duplex fiber core. For use with 9 micron fiber cables, it can reach a distance of up to 80km. The SFP-3611 transceiver operates using a wavelength of 1550nm with a DFB Laser Diode light source and has a LC connector.

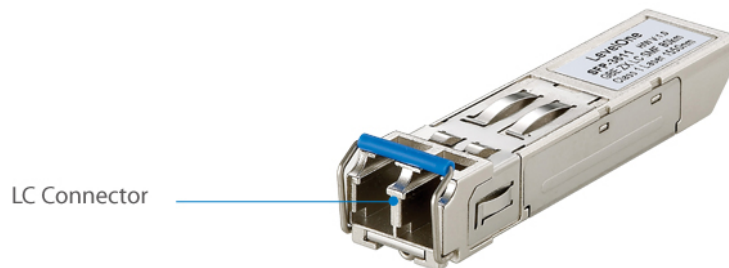

Key Features

- 1550nm DFBLD
- Data Rate: 1.25Gbps,NRZ
- Single +3.3V Power Supply
- RoHS Compliant and Lead-free
- AC/AC Differential Electrical Interface
- Compliant with Multi-Source Agreement(MSA)
- Duplex LC Connector
- Compliance with specifications for IEEE-802.3z Gigabit Ethernet at 1.25Gbps
- Compliance with ANSI specifications for Fibre Channel applications at 1.06Gbps
- No configuration or installation software required
- Eye Safety Designed to meet LASER Class 1 comply with EN60825-1



Specifications

System Specifications

Standards & Protocols:

IEEE 802.3z Gigabit Ethernet
SFP Multi-Sourcing Agreement(MSA)

Connectors and Cabling:

Duplex LC Connector, Single-mode fiber(SMF)

Wavelength(nm):

1550nm DFB Laser Diode

Optical Receive Sensitivity:

-23 dBm

Optical Link Power Budget:

23 dB

Power Input:

Supply Voltage: 3.3V

Max Voltage/Current: 6V/300mA

Features

General:

Hot-swappable

Performance

Data Transfer Rate:

1.25 Gbps Bi-directional data link

Operating Distance:

up to 80km (9/125?m)

Fiber channel up to 1.06Gbps

Optical Transmission Power:

0 ~ +5 dBm

Environment

Temperature (°C):

Operating: 0°C ~ 70°C

Storage: -40 ~ 85°C

Humidity (Non-condensing):

5 ~ 95%

Physical Specifications

Dimensions (W x D x H mm):

13.7 x 56.5 x 8.95 mm

Weight (g):

20g


Approval and Compliance

EMI/EMS:

Class 1 eye safety and comply with EN 60825-1

CE, FCC, RoHS

Diagram

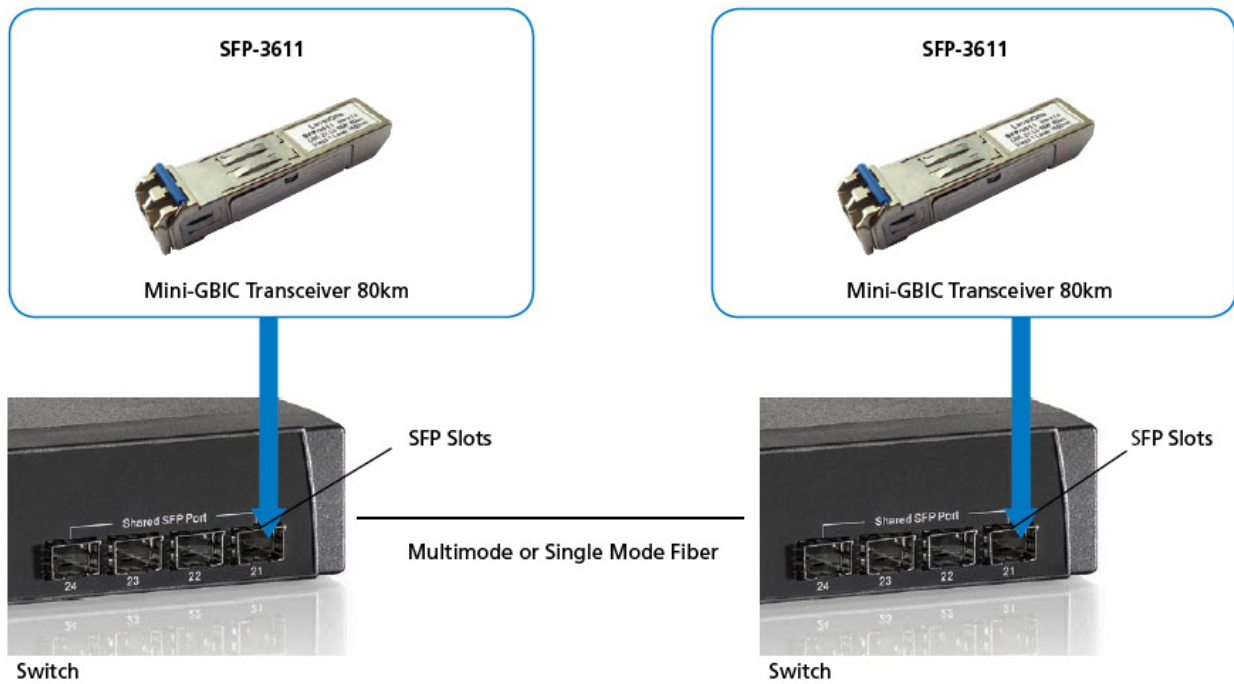

Order Information

SFP-3611

Package Contents

SFP-3611