


SFP-6121 Version: 1

10Gbps SMF SFP-Plus Transceiver, 10km, 1310nm

LevelOne's SFP-Plus Transceivers are hot-swappable multi-purpose optical modules support 10Gigabit Ethernet applications across most switching and routing platforms. The transceivers support to operate at 10Gbps serial optical data transfer rates on a single duplex fiber core with a length of up to 40km (SMF) or 300m (MMF), ideally suited for data centers, enterprise and storage area networks. In addition, the LevelOne SFP-Plus transceivers adopt the most advanced technology to minimize the power consumption in ultra-high speed.

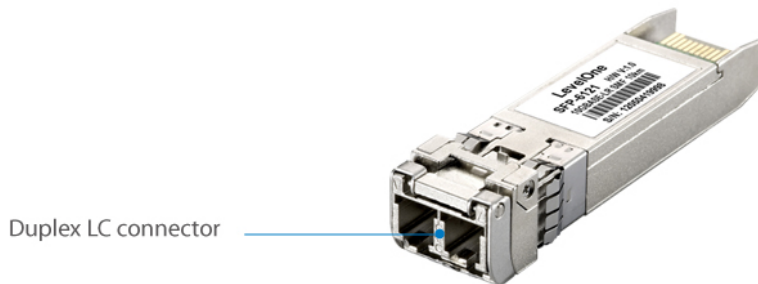

Key Features

- Διαθέτει υψηλής ποιότητας SFP-Plus μικρής εμβέλειας 10Gbase συν πομποδέκτη
- Συμμόρφωση με SFP Multi-Sourcing Agreement (MSA) για λειτουργία με συμβατές συσκευές σε MSA
- Υποστηρίζει Digital Optical Monitoring (DOM) και Digital Diagnostics Monitoring Interface (DDMI) για εύκολη παρακολούθηση της κατάστασης
- Δυνατότητα αντιμετάθεσης εν ώρα λειτουργίας (hot-swap) με αποτέλεσμα την αδιάκοπη παροχή υπηρεσιών
- Παρέχει σύνδεσμο duplex LC
- Θερμοκρασία λειτουργίας: 0°C ~ 70°C

Works Well With



GTL-2880

20 GE + 4 GE Combo SFP + 4 10GE SFP-Plus L2-Plus Managed Switch

**GTL-5280**

44 GE + 4 GE Combo SFP + 4 10GE SFP-Plus L2-Managed Switch

**GTP-2880**

20 GE PoE-Plus + 4 GE PoE-Plus Combo SFP + 4 10GE SFP-Plus L2-Plus Managed Switch, 185W

Specifications

System Specifications

Connectors and Cabling:

Duplex LC Connector, Single-mode fiber(SMF)

Wavelength(nm):

1310nm DFB Laser Diode

Transmit Power:

-8.2 ~ +0.5 dBm

Power Budget:

6.2 dB

Power:

Supply Voltage: 3.3V

Max Voltage/Current: 3.6V/330mA

Standards & Protocols:

IEEE 802.3ae 10GBASE

SFP+ Multi-Sourcing Agreement(MSA)

Receive Sensitivity(dBm):

-14.4 dBm

Physical Specifications

Dimensions (W x D x H mm):

13.7 x 56.5 x 8.95 mm

Weight (g):

20g

Performance

Data Transfer Rate:

10Gbps Bi-directional data link

Operating Distance:

up to 10km (9/125μm)

Fiber channel up to 10.518Gbps

Features

General:

Hot-swappable

Environment

Temperature (°C):

Operating: 0°C ~ 70°C

Storage: -40 ~ 85°C

Humidity (Non-condensing):

5 ~ 95%


Others

Approval and Compliance:

Class 1 eye safety and comply with EN 60825-1

CE, FCC, RoHS

Diagram

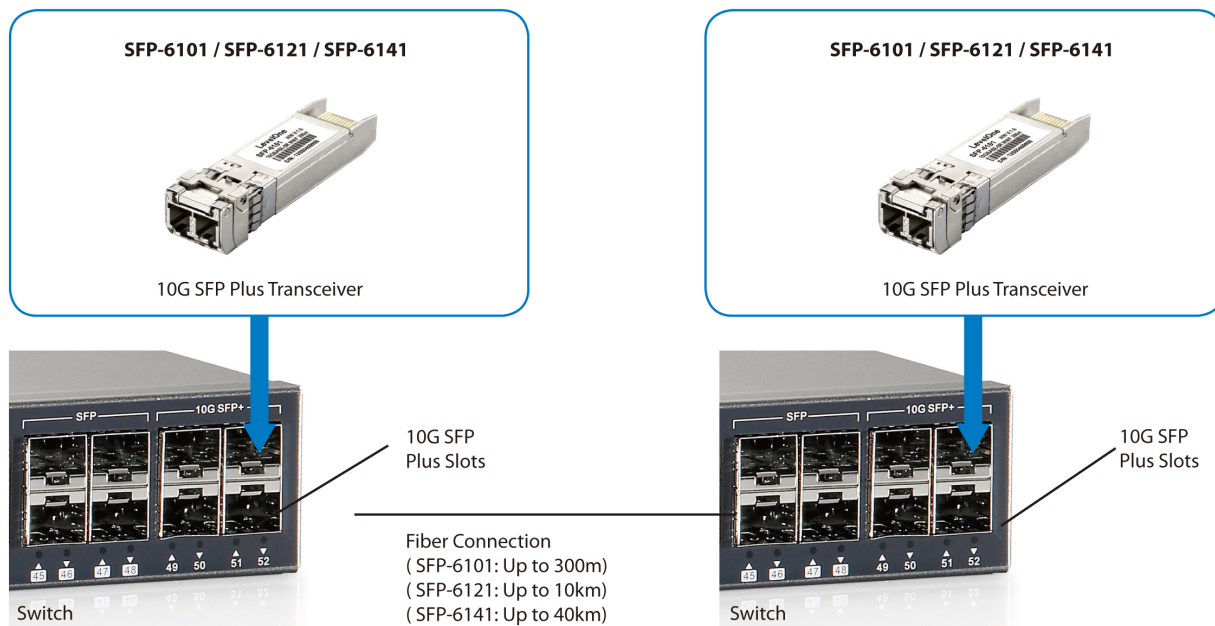

Order Information

SFP-6121