

NOTE:

1.CABLE: UL-2835 28AWG(7/0.127)*2C+28AWG(7/0.127)*1PR
+AL-FOIL/MYLAR+BRAID (65%) PVC JACKET
OD:3.6±0.15mm COLOR:BLACK REV 2.0

2.CONNECTOR:

P1: USB A TYPE MALE GOLD PLATED 30u" CONTANT,
NICKEL PLATED SHELL REV 2.0

P2: MINI USB B TYPE 5P MALE GOLD FLASH CONTANT, NICKEL PLATED SHELL .

3.HOOD: MOLDED TYPE, PVC 45P, COLOR:BLACK

4.ELECTRICAL TEST:

<1>.100% OPEN SHORT & MIS WIRE TEST .

<2>.CONTACT RESISTANCE 3 Ohm MAX

<3>.INSULATION RESISTANCE 20M Ohm MIN.

5.PACKING: EACH PC / Equip ZIP BAG (A) + BAR CODE LABEL


BAR CODE: 4015867107829

10 PCS / BIG PE BAG

80 PCS / CARTON

0.83 CUFT

PIN OUT

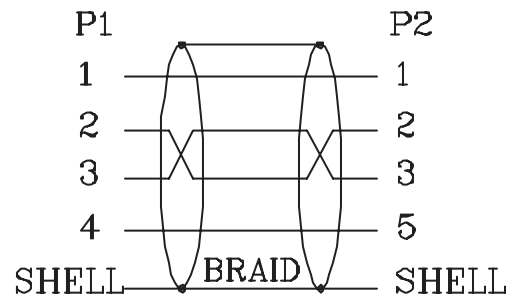

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05



USB 2.0 Cable A/M ->Mini 5P/M