

LogiLink_®


3x1 HDMITM **Switch** 1080p/60 Hz

Art. No.: HD0042

Designed for applications that require the routing of 3 sources to 1 compatible display device. It enables the reliable transmission at video resolutions up to 1080p@60 Hz. Features auto and manual switching modes for selection; instantly switching for a smooth video transition between HDMI ports.

Features:

- » Allows up to three HDMI sources to be connected to one HDMI display
- » Supports manual switching, remote switching or automatic switching
- » Resolution up to Full HD 1080p@60 Hz
- » Bandwidth: 2.5 Gbps/250 MHz per Channel
- » Supports 3D and HDCP pass-through
- » Supports Consumer Electronics Control (CEC)
- » Supports 12bit per channel (36bit all channels) deep color
- » Supports uncompressed audio such as LPCM
- » Supports compressed audio such as DTS, Dolby Digital (including DTS-HD Master Audio™ and Dolby TrueHD)

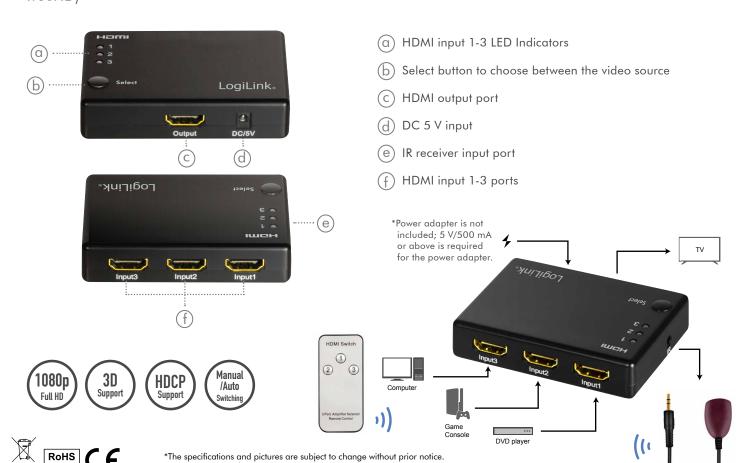

*All trade names referenced are the registered trademarks of their respective owners.

Specifications:

Input Ports	3x HDMI-A female, 1x 3.5mm jack for IR
Output Port	1x HDMI-A female
HDMI Version	1.3
HDCP Version	1.3
HDMI CEC	Yes
Output Resolution	480i/60 Hz, 576i/50 Hz, 1080i/50/60 Hz, 480p/60 Hz, 576p/50 Hz, 720p/50/60 Hz, 1080p/24/25/30/50/60 Hz
Video Bandwith	2.5 Gbps/250 MHz
3D Supporting	Yes
Input and output DDC signal	Yes
Chassis Material	ABS
LED Indicator	Yes
IR Remote Support	Yes
Power Consumption	5 W max.
Uncompressed Audio	LPCM 7.1
Compressed Audio	DTS, Dolby Digital, DTS-HD Master Audio™, Dolby TrueHD
Operating Temperature	0°C-70°C
Operating Humidity	10%–85% RH (no condensation)
Storage Temperature	-10°C-80°C
Storage Humidity	5%–90% RH (no condensation)
Dimensions	8x5.8x1.8 cm
Weight	0.054 kg

Package Contents:

- » 1x 3x1 HDMI Switch
- » 1x Remote Control
- » 1x IR Receiver
- » 1x User Manual

Package Information:

» Packing Dimension: 160x107x50 mm

» Packing Weight: 0.16 kg

» Carton Dimension: 575x255x345 mm

» Carton Q'ty: 40 pcs» Carton Weight: 7.2 kg





