

GEP-1020 Έκδοση υλικού (h/w): 1



10-Port Gigabit PoE Switch, 802.3at PoE+, 2 x SFP, 8 PoE Outputs, 150W

LevelOne GEP-1020 provides 8 x 10/100/1000Base-T PoE-Plus ports and 2 x 1000Base-X SFP (Small Form Factor Pluggable) slots. This switch is IEEE 802.3af/at compliant, providing power and data over a single Ethernet cable to any PoE device, with total power budget of 150W, up to 30W per port. Together with Energy Efficient Ethernet (IEEE 802.3az) standard compliant, it substantially lower power consumption during periods of low-link utilization. Moreover, supports Gigabit Ethernet connectivity with 9K jumbo frames for network performing enhancement. Ideal for small businesses that prefers an affordable solution for PoE deploying infrastructure.



1. LED Indicators
2. 10/100/1000Mbps RJ-45 PoE Ports
3. 100/1000Base SFP Slot



4. Power Switch On/Off
5. Power Socket

Βασικά χαρακτηριστικά

- 8 θύρες PoE-Plus Gigabit Ethernet και 2 υποδοχές Gigabit SFP
- 1000Mbps full-duplex, 10/100Mbps full/half-duplex, auto-negotiation, auto-MDI/MDIX
- IEEE 802.3af / at PoE και συμβατό με απλοποίηση ανάπτυξης και εγκατάστασης
- Πλαίσια Jumbo 9K για αύξηση ταχύτητας μεταφοράς δεδομένων
- Υποστηρίζει αυτόματη εκμάθηση και αυτόματη ηλικίωση (διαγραφή) διεύθυνσης MAC 8K
- Αυτόματος εντοπισμός και προστασία μη τυπικών συσκευών PoE
- Ο έλεγχος ροής IEEE 802.3x παρέχει προστασία ενάντια στην απώλεια πακέτων για αξιόπιστη μετάδοση δεδομένων
- Ελαχιστοποίηση αποτυπώματος άνθρακα με προηγμένη τεχνολογία ενεργειακής απόδοσης (IEEE 802.3az)
- Συμπεριλαμβάνεται κιτ τοποθέτησης σε rack 19-ιντσών
- Συνολικός προϋπολογισμός ενέργειας PoE: 150W, έως και 30W ανά θύρα

Highlight

Eco-Conscious Design

LevelOne is always committed to providing significant energy savings products. With the implementation of the advanced energy efficiency technology (IEEE 802.3az), allowing for monitoring the link status of each port. Therefore reducing power consumption if a connected device is not active at a certain period of time. In this way, the power can be saved and utilized more effectively.

Προδιαγραφές

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet
IEEE 802.3u 100-BASE-TX, Fast Ethernet
IEEE 802.3ab 1000BASE-T, Gigabit Ethernet
IEEE 802.3x Flow Control (full-duplex flow control)
IEEE 802.3af Power over Ethernet (PoE)
IEEE 802.3at Power over Ethernet Plus (PoE+)
IEEE 802.3az Energy-Efficient Ethernet

Buffer Memory:

512KB

Connectors and Cabling:

- 8 x 10/100/1000Base-T RJ-45 PoE-Plus Ports
- 2 x 100/1000Base-X SFP Slots

Indicator:

Power; Link/Active; PoE

Transmission Method:

Store-and-Forward

Power Input:

100-240V AC, 50-60 Hz, Internal Power Supply

Power Consumption:

< 150W

Features

General:

Flow Control: Half Duplex - Backpressure; Full Duplex - Pause frame

PoE:

Power Budget: Max. 140W
Power Output: Up to 30W per port
Protection: Circuit protection to prevent power interference between ports
Pin Assignment: 1/2(+), 3/6(-)

Performance

Backplane (Gbps):

16Gbps

MAC Address Table:

8K

Data Transfer Rate:

10/100/1000Mbps

Packet Forwarding Rate:

1000Mbps port - 1,488,000pps
100Mbps port - 148,000pps
10Mbps port - 14,880pps

Jumbo Frame (K):
9KB

Environment

Power Saving:

IEEE 802.3az Energy Efficient Ethernet:

- Automatically turns power off on RJ-45 port when detecting link down or Idle of client
- Cable length detection: Adjusts the signal strength based on the cable length
- Reduces the power consumption for cables shorter

Temperature (°C):

Operating: 0°C ~ 40°C

Storage: -40°C ~ 70°C

Humidity (Non-condensing):

Storage: 5% ~ 90%

Operating: 5% ~ 90%

Deployment:

19-inch rack-mountable

Physical Specifications

Dimensions (W x D x H mm):

280 x 215 x 44 mm

Weight (g):

2300g

Reliability

MTBF:


41.3421(K.hrs)

Approval and Compliance

EMI/EMS:

FCC Part 15 Class A, CE, RoHS

Διάγραμμα

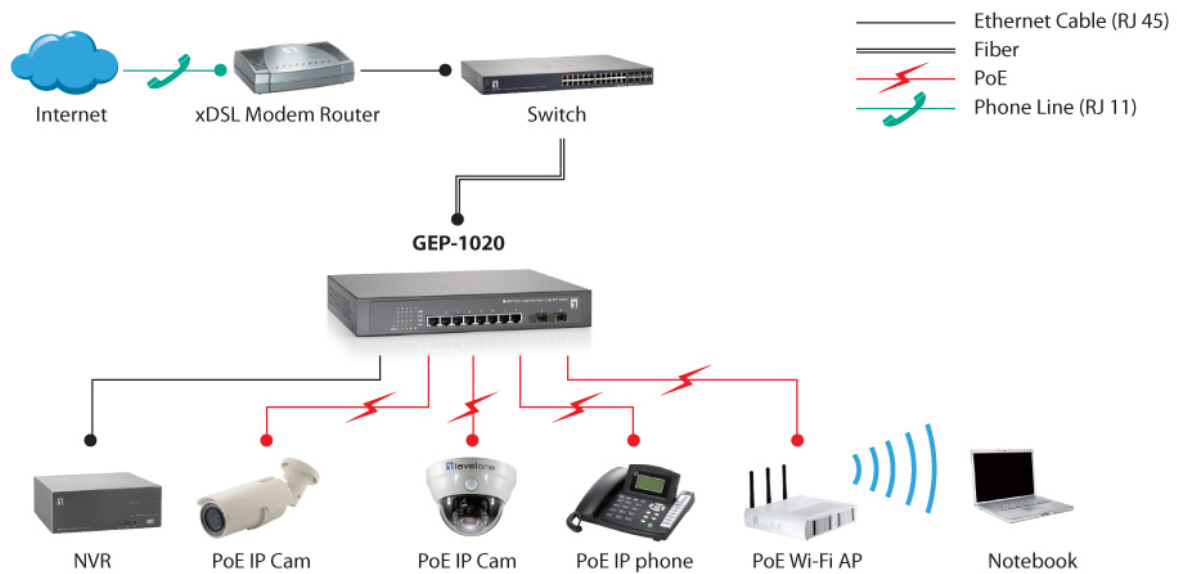

Order Information

GEP-1020

Περιεχόμενα συσκευασίας

GEP-1020

Power Cord

19" Rack Mount Kit

Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.